


Portal

Enhance Accessibility with Fredrikson's Portal Seamless Integration for Optimal Workflow

Fredrikson's Portal revolutionizes accessibility in production environments, crafted from durable stainless steel to provide a convenient opening and walkway for both operators and goods transportation. Designed to integrate effortlessly with both new and existing conveyor lines, this unit enhances operational areas, making them more accessible and efficient.

The portal is the perfect solution for creating a more accessible and safe working environment around conveyor systems. It stands as a testament to Fredrikson's commitment to customer-centric innovation, offering a pratical and efficient way to navigate production areas.

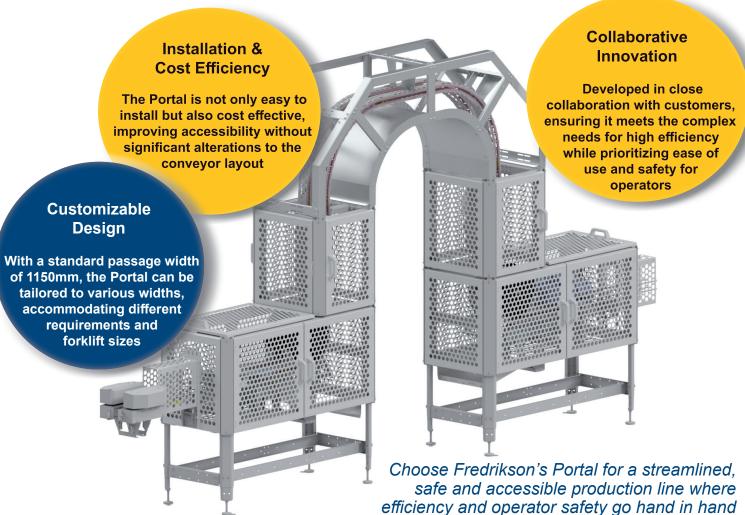





Technical data

Material	Stainless steel EN1.4301
Goods width	40 – 120 mm
Chain width	70 mm
Installation dimension.	Width: 5267 mm
Passage dimension	Width: Standard 1150* mm
Capacity max	Varies with product specification
Noise emission	~74dB
*Customized according to request.	

Electrical data

Communication	Profinet or relays
Phase	3N~
Frequency	50/60 Hz
Voltage	400 V
Power consumption Varies with product specification	



The pictures are computor generated and indicative only.

