


# Divider

#### Unlock the Potential of Fredrikson's Divider

## Precision in Every Split

Increase your production capacity with Fredrikson's Divider, the innovative solution designed to distribute a single product flow into two or three separate streams with high accuracy. This state of the art unit dramatically improves traditional systems in terms of flexibility, speed and capacity, enabling a controlled and high production efficiency.

The compact design ensures that it integrates seamlessly with your existing setup, offering adjustable settings for percentage distribution and batch sizes without the need for emptying when changing lines.

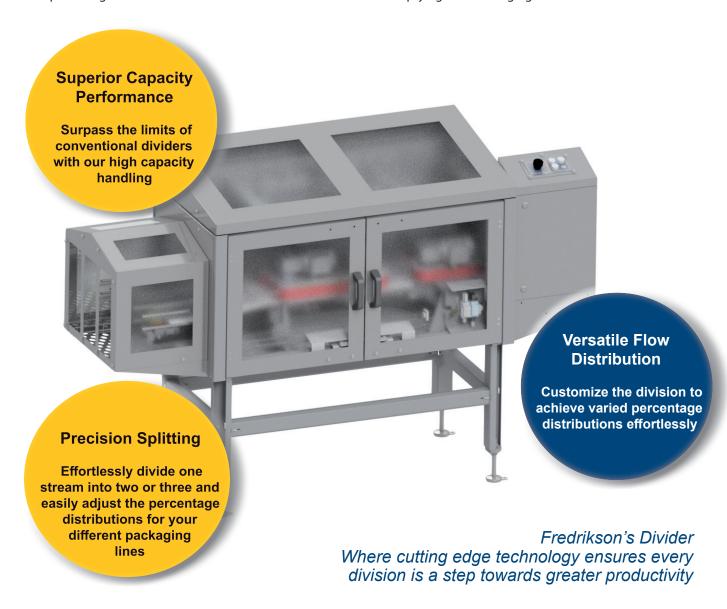






### Technical data

Material Stainless steel EN1.4301
Package width 40 – 120 mm
Chain width 70 mm
Min. Conveyor speed 0,33 m/s
Max. Conveyor speed 1 m/s
Min. Conveyor Length IN 1500mm
Max. Conveyor Length IN2500mm
Min. Conveyor Length OUT 2500mm
Max. Conveyor Length OUT 5500mm
Entry/outfeed height825-1100 ± 50mm
Capacity ≤30000p/hour*
Installation dimension Width: 760 mm Length: 2410 mm
* Varies with product specification

## Electrical data

Material on Cabinet Stainless steel AISI 304L
Communication Profinet or relays
Voltage 3N/PE . 400 Vac
Current 16A
Frequency 50 Hz

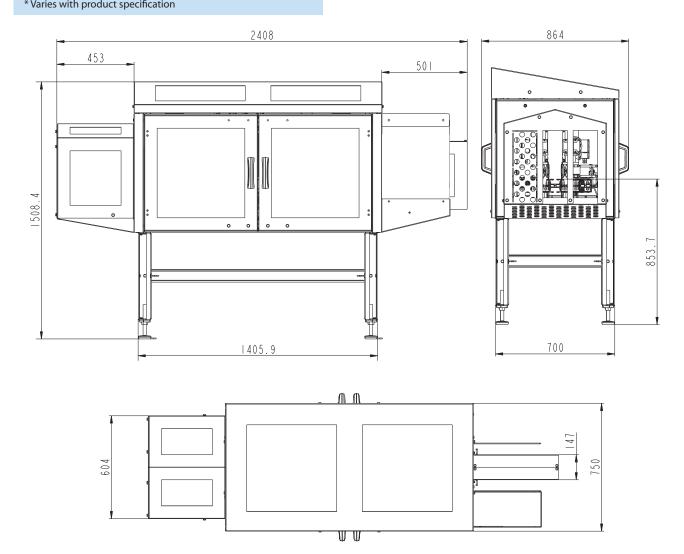



Fredriksons AB
PO Box 148 • SE-592 23 Vadstena
Phone: +46 143 296 00
info@fredriksons.se • www.fredriksons.se